

6V & 12V | **10A**

GENIUS10



CHARGE DEAD BATTERIES. BATTERY CHARGER AND MAINTAINER.

**6V &
12V**

DO MORE WITH GENIUS.

Designed for 6-volt and 12-volt lead-acid automotive, marine, and deep-cycle batteries, including flooded, gel, AGM, and maintenance-free, plus lithium-ion batteries.

**ZERO
VOLTS**

CHARGE DOWN TO ZERO VOLTS.

Charge dead batteries as low as 1-volt. Or use the all-new Force Mode that allows you to take control and manually begin charging dead batteries down to zero volts.

115%

MORE POWER.

Similar to our G7200, just better. It's 34% smaller and delivers 65% more power. And it's simpler and easier to use than ever before.

24/7

WORRY-FREE CHARGING.

Provides all-season, all-weather charging for a healthy battery, leave plugged in 24/7 with no worries of overcharging. Automatically returns to its last selected mode.



NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

LEAD ACID



AUTO | MARINE | RV | POWERSPORT | LAWN & GARDEN



CHARGING MODES

LEAD-ACID

Used for 6V & 12V wet cell, gel, enhanced flooded, maintenance-free, & calcium batteries.



AGM

Used for 6V & 12V AGM or maintenance-free batteries.



LITHIUM

Used for 12V lithium-ion batteries (including lithium iron phosphate). Only for batteries with Battery Management Systems (BMS).



REPAIR

Used to repair old, idle, damaged, stratified, or sulfated batteries.






SUPPLY

Converts to a DC power supply with an output of 13.6V, used for powering any 12V DC device, or as a memory retainer when replacing a battery.



WHAT'S IN THE BOX

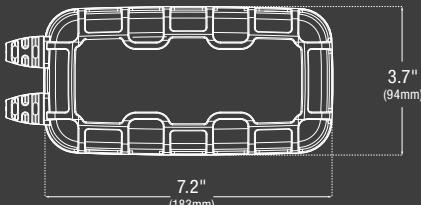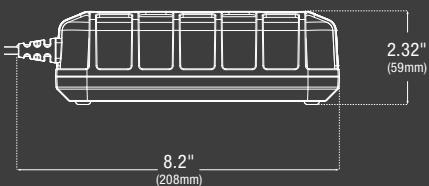


GENIUS10 Battery Charger + Maintainer

Mounting Bracket and Strap



(2) #8x1" Self-tapping screws



Battery Clamps + Integrated Eyelets

NOCO geniusTM 10



ADVANCED DIAGNOSTICS

HIGH VOLTAGE

The battery voltage is too high for the selected charge mode. Check the battery and charge mode.



BAD BATTERY

There is a possible battery short or the battery will not hold a charge. Consult a professional.



REVERSE POLARITY

Charger is connected to the battery in reverse. Reverse the connections.



STANDBY

The charger is in standby or the battery voltage is too low for the charger to detect.



CHARGE LED

Indicates the charge level of the internal battery.



Battery Size CHARGING TIMES

20Ah

1.5hr

*Approximate charging times at 50% depth of discharge.

40Ah

3hr

80Ah

6hr

100Ah

7.5hr

TECHNICAL SPECIFICATIONS

LINE VOLTAGE AC:	100-240 VAC, 50-60Hz
OUTPUT POWER:	150 Watts Max
CHARGING VOLTAGE:	Various
CHARGING CURRENT:	10A (12V), 10A (6V)
CHEMISTRY:	Lead-Acid and Lithium
OPERATING TEMPERATURE:	-4° to 104° F (-20° to +40° C)
STORAGE TEMPERATURE:	-22° to 140° F (-30° to +60° C)
LOW-VOLTAGE DETECTION:	1V (12V), 1V (6V)
BACK CURRENT DRAIN:	<0.5mA
BATTERY CAPACITY:	Up to 230Ah, Maintains All Battery Sizes
HOUSING PROTECTION:	IP65
COOLING:	Natural Convection
UNIT WEIGHT:	3.33 lbs (1.51 kg)
VOLUMETRICS:	<p>Retail Packaging: Dimensions: 4.41" x 4.48" x 9.10" Weight: 3.99lbs UPC: 0-46221-19005-2</p> <p>Master Carton: Dimensions: 19.02" x 9.84" x 5.71" Weight: 17.42lbs Quantity: 4 UCC: 10046221190059</p> <p>Inner Carton: Dimensions: 4.60" x 4.76" x 9.21" Weight: 4.17lbs</p> <p>Units Per Pallet: NA - 280 Units International - 224 Units</p>

NOCO[®]

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

