

# 20A

# 100PSI

# NOCO® AIR20



## ULTRAFAST® PORTABLE AIR COMPRESSOR.

### UNPARALLELED SPEED.

NOCO AIR has been tested and proven to operate longer and inflate faster than leading competitors. Inflate flat tires from 0 to 40 psi in under 3 minutes.

### COMPACT DESIGN.

Integrated hose clips, dedicated slots for accessories, and effortless power-cord storage allow AIR to be quickly and easily stored or used.

### PREMIUM BUILD.

NOCO AIR is built with solid aluminum, heavy-duty powder coat, and reinforced plastic.

### LED FLASHLIGHT.

Provides a tactical-grade experience with long-range, bright illumination, controllable luminosity, and emergency modes.



**NOCO**

30339 Diamond Parkway, #102  
Glenwillow, OH 44139 | USA  
1.800.456.6626

no.co

# ULTRAFAST<sup>®</sup> INFLATION



# SMART PRESSURE AUTO-SHUTOFF

AIR automatically shuts off upon reaching the desired pressure. Utilizing a unique algorithm — AIR achieves precise accuracy even at higher pressure.



Integrated Hose Clip

Adapters

**280 W**  
MOTOR POWER

**2.5 MIN** 0-40 PSI  
\*205-65R16 95H TIRE  
TIME TO INFLATE

**47 SLPM**  
FLOW RATE



## INTUITIVE INTERFACE.



## TOTAL VERSATILITY.

With its rugged portable design, integrated cord management, dedicated slots for accessories, and ultra-compact size, it can easily be stored - and ready to take on anything.

## WHAT'S IN THE BOX

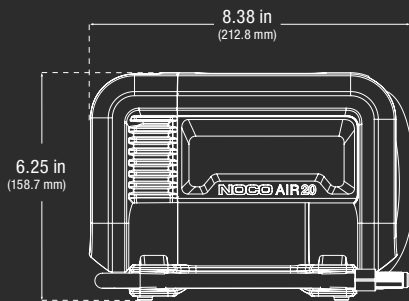

User Guide &  
Warranty Information

- Needle Adapter
- Presta Valve Adapter
- Inflatable Toy Adapter



Microfiber Storage Bag

AIR20 Portable Air Compressor  
w/ 3ft Braided Hose & 20ft  
Power Cord + Clamps

## TECHNICAL SPECIFICATIONS

MAX AIRFLOW AT 0 PSI:	47 SLPM
MAX PRESSURE:	100 psi / 6.89 bar / 689.48 kPa
MOTOR RATING:	280W
MOTOR MAX CURRENT DRAW:	22A
DUTY CYCLE:	15 min @ 30PSI on time/45 min off time
MANUAL MODE DUTY CYCLE:	5 min on time/30 min off time
APPROXIMATE INFLATION TIME at 13.8V (0-40 PSI):	2.7 min +/- 10% with 205-65R16 95H Tire
AIR HOSE LENGTH:	3 ft
POWERCORD LENGTH:	20 ft
WIRE GAUGE:	14 AWG
POWER TYPE:	Clamps
IP RATING:	IP55
COOLING:	Natural Convection
OPERATING TEMPERATURE:	-4° to 122° F (-20° to +50° C)
STORAGE TEMPERATURE:	-4° to 122° F (-20° to +50° C)
WEIGHT:	6.81 lbs (3.09 kg)
VOLUMETRICS:	<b>Retail Packaging:</b> Dimensions: 11.81" x 5.79" x 9.02" Weight: 8.84 lbs UPC: 0-46221-23004-8
	<b>Master Carton:</b> Dimensions: 19.33" x 13.78" x 12.64" Weight: 38.40 lbs Quantity: 4 ITF-14: 10046221230045
	<b>Inner Carton:</b> Dimensions: 12.13" x 6.38" x 9.41" Weight: 9.24 lbs
	<b>Units Per Pallet:</b> NA: 72 units AU/UK/HP/JP: 48 units EU/ND/RM/FN: 40 units

**NOCO**

30339 Diamond Parkway, #102  
Glenwillow, OH 44139 | USA  
1.800.456.6626

no.co

