

# BLSOLAR5 5W 12V



## BATTERY LIFE+ Solar Battery Charger



**NOCO**  
Rigid Solar

Safely charges wet cell, gel cell, AGM or any maintenance-free battery.

Maintain batteries of all sizes in cars, trucks, ATVs, motorcycles, boats and more. Just add sun.

Keeping your batteries **fully charged and maintained** is easy. Just connect and expose the solar panel to the sun. Use the existing 12-volt auxiliary port for in-vehicle charging, or connect directly to your car battery. The BLSOLAR5 is a **5-watt** solar battery charger and maintainer for maintaining 12-volt lead-acid batteries where A/C power is not readily available. It provides up to **410mA** of trickle charging current directly from the sun to counteract parasitic drains of most vehicles, such as cars, boats, trucks, motorcycles, ATVs, RVs, lawn mowers, and more.




A unique low-profile design provides a waterproofing barrier, plus dirt, dust, and other elements - rated at IP65.

**UV**  
Resistant

Engineered to take the abuse of the sun through the use of color stabilization and UV inhibitors.

THIN  
FILM

Converts energy directly from the sun - even in low-angle, low-light, cloudy, and overcast conditions.



Protects against accidental battery drain when connected at night.


The NOCO Company  
30339 Diamond Parkway, #102  
Glenwillow, OH 44139 | USA  
1.800.456.6626

no.co

**NOCO**  
Since 1914


# BLSOLAR5

Lightweight. Compact. Efficient.

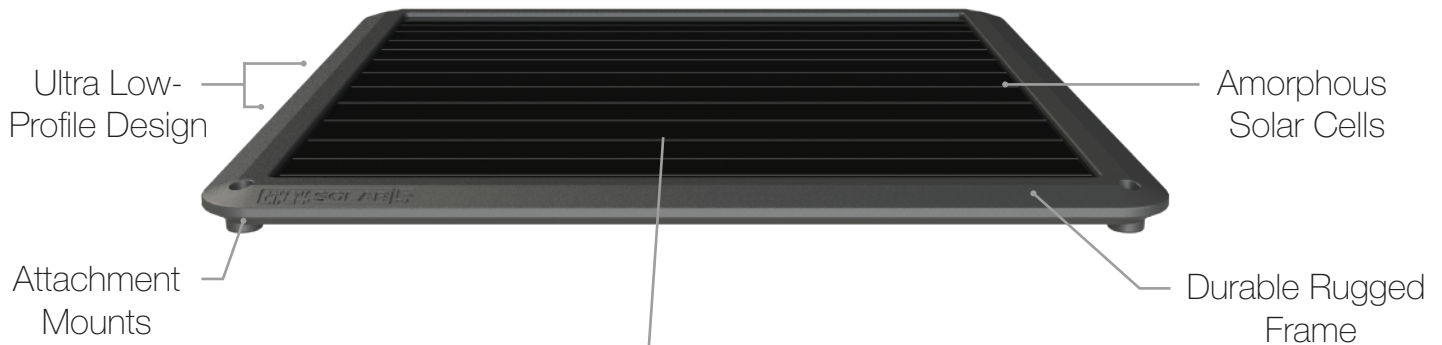

## Low-profile design with homogeneous solar cell structure.

The thin-film amorphous solar technology makes a homogeneous solar cell configuration for maximum solar output.

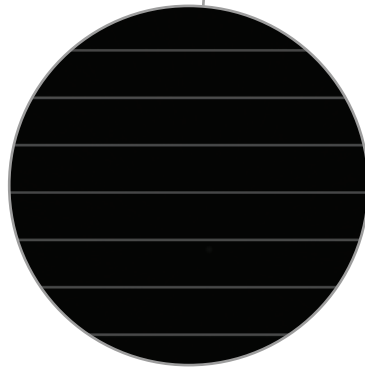

## What's In The Box

- BLSOLAR5 Solar Battery Charger and Maintainer
- GC001 Battery Clamps
- GC003 12V Male Plug
- User Guide & Warranty Information

## Technical Specifications

|                    |  |
|--------------------|--|
| Wattage:           | 5 Watts (Max)  |
| Technology:        | Thin Film Amorphous  |
| DC Cord Length:    | 96 Inches  |
| Type of Batteries: | Suitable for Wet Cell (Flooded), Gel Cell, AGM, Enhanced Flooded Battery or any Maintenance-Free Battery |
| IP Rating:         | IP65   |

### Retail Packaging:

Dimensions: 15.2"x 2.8"x 15.3"  
Weight: 3.9lbs  
UPC: 0-46221-12070-7


### Inner Carton:

Dimensions: 15.5"x 3.2"x 16.1"  
Weight: 4.8lbs

### Master Carton:

Dimensions: 20.2"x 16.9"x 16.3"  
Weight: 31.0lbs  
Quantity: 6

UCC: 10046221120704  
Units Per Pallet: 72 Units

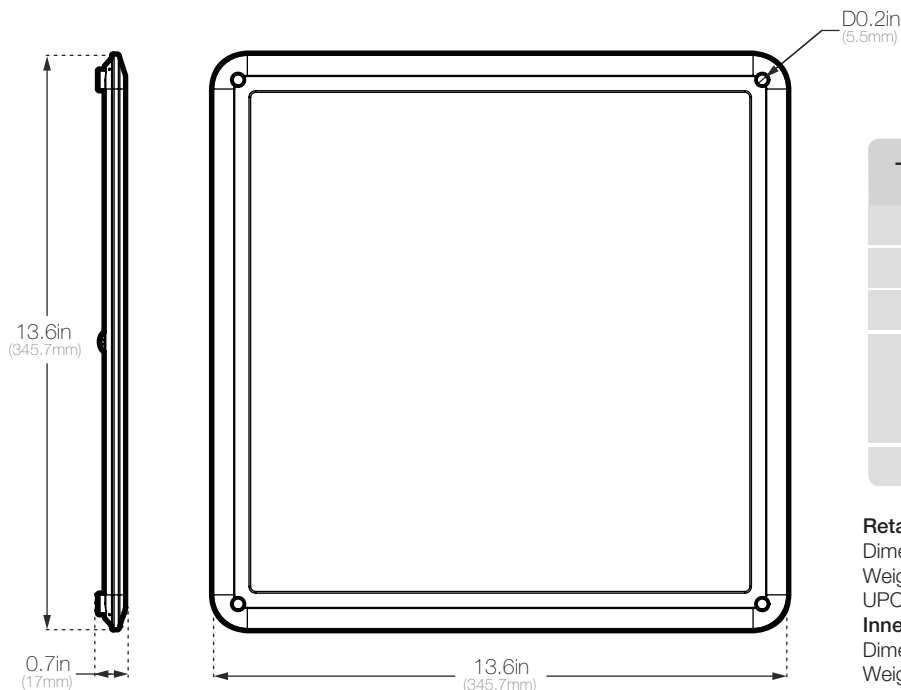

The NOCO Company  
30339 Diamond Parkway, #102  
Glenwillow, OH 44139 | USA  
1.800.456.6626

no.co

**NOCO**  
Since 1914