

AIR COMPRESSOR  
**12V | 22A**

BOOST-X JUMP STARTER  
**12V | 2000A**

# AX65



## ALL IN ONE LITHIUM POWERED. AIR COMPRESSOR + JUMPSTARTER.

### START DEAD BATTERIES.

Extreme jump starting power - 2000 amps - for fast and powerful engine starts for up to 8.0-liter gasoline and 6.0-liter diesel engines.

### INFLATE FLAT TIRES.

Inflate 205-265 R16 tires astonishingly fast in 2 minutes. A pressure sensor and smart tech pause inflation at the set pressure and shut it off for precise accuracy.

### DESIGNED TOUGH.

Designed for rugged environments with rubberized port covers and anti-vibration feet for uncompromising operation - zero movement.



**NOCO**

30339 Diamond Parkway, #102  
Glenwillow, OH 44139 | USA  
1.800.456.6626

no.co

# AIR COMPRESSOR + JUMP STARTER 22A MOTOR 2000A BOOSTX

Introducing the next generation of air compressors — an all new design that offers ultrafast, automatic inflation — combined with the extreme jump starting power of BoostX.


\*Do not use both features simultaneously.

## INFLATE FLAT TIRES | START DEAD BATTERIES

### INTUITIVE INTERFACE




### WHAT'S IN THE BOX

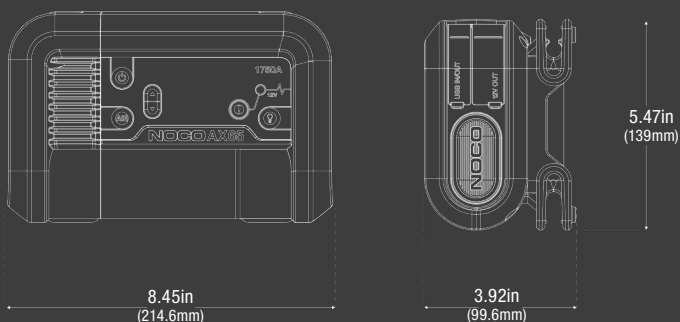


\*Accessories not to scale with AX65

AX65 Air Compressor + BoostX

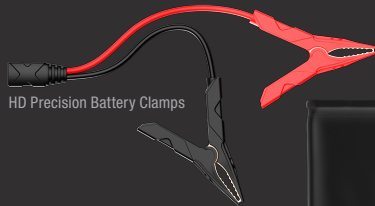

USB-C to USB-C Cable 24"



### TOTAL VERSATILITY.

With its rugged portable design, integrated cord management, dedicated slots for accessories, and ultra-compact size, it can easily be stored - and ready to take on anything.

### TECHNICAL SPECIFICATIONS

MAX AIRFLOW AT 0 PSI:	67 SLPM
MAX PRESSURE:	100 psi
MOTOR RATING:	280W
MOTOR MAX CURRENT DRAW:	22A
DUTY CYCLE:	7 min @ 30 PSI "ON" time/53 min "OFF" time
MANUAL MODE DUTY CYCLE:	5 min "ON" time/55 min "OFF" time
POWER TYPE:	12V Plug
IP RATING:	IP55
OPERATING TEMPERATURE:	-4° to 122° F (-20° to +50° C)
STORAGE TEMPERATURE:	-4° to 122° F (-20° to +50° C)
GAS ENGINE SIZES:	Up to 8.0L
DIESEL ENGINE SIZES:	Up to 6.0L
PEAK CURRENT:	2000A
BATTERY TYPES:	12V Lead-Acid Only (Wet, Gel, MF, EFB, AGM)
WEIGHT:	7.01 lbs (3.18 kg)
WARRANTY:	1-Year Limited Warranty
VOLUMETRICS:	<p><b>Retail Packaging:</b> Dimensions: 10.63" x 6.42" x 7.24" Weight: 9.79 lbs UPC: 0-46221-24025-2</p> <p><b>Master Carton:</b> Dimensions: 16.73" x 14.57" x 11.81" Weight: 43.48 lbs Quantity: 4 ITF-14: 10046221240259</p> <p><b>Inner Carton:</b> Dimensions: 10.83" x 6.69" x 6.81" Weight: 10.21 lbs</p> <p><b>Units Per Pallet:</b> US: 108 units</p>

NOCO

30339 Diamond Parkway, #102  
Glenwillow, OH 44139 | USA  
1.800.456.6626

no.co

