


12V

4Ah

NLP14

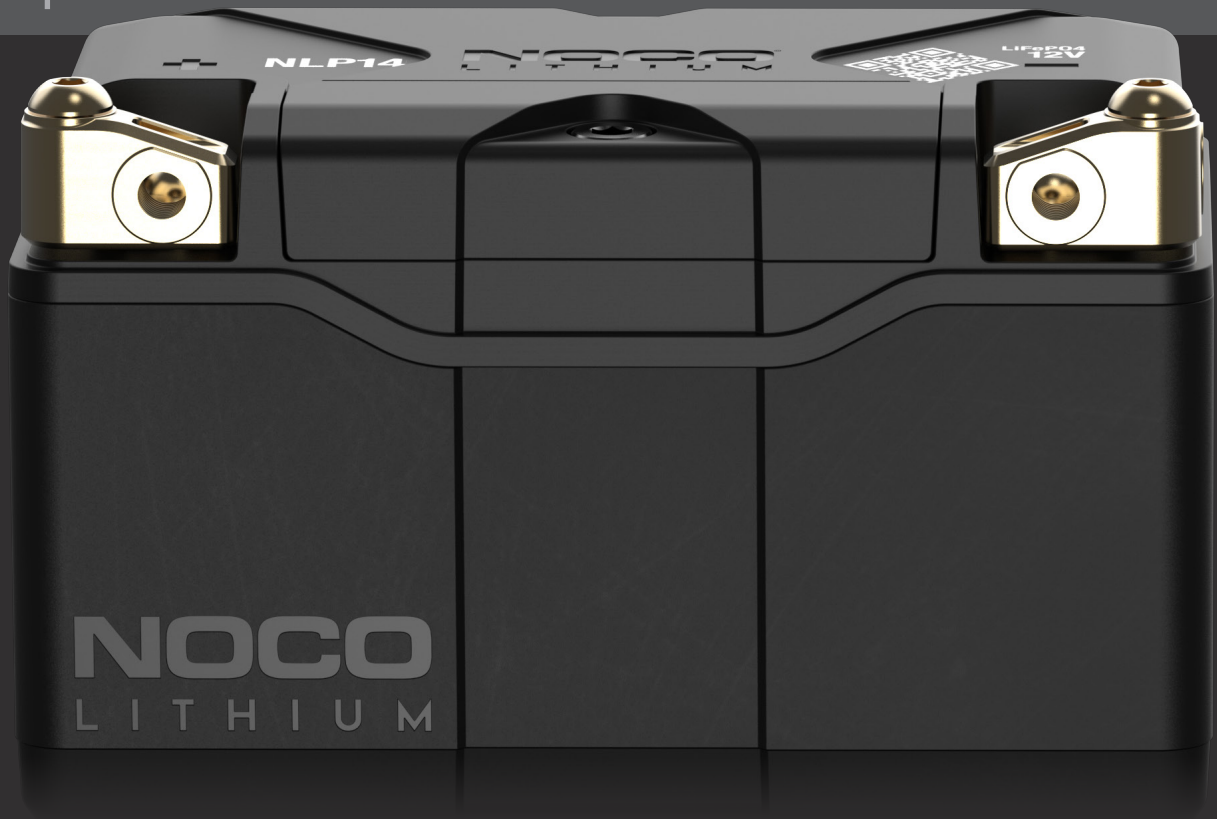

# INSANE PERFORMANCE. LITHIUM POWERSPORT BATTERY.™

2X

MORE POWER.

10X

MORE STARTS.

5X

LONGER LIFE.

## DYNAMIC BMS.

Equipped with an auto-enabled, advanced battery management system that provides maximum protection, performance, and bi-directional cell equalization for long-lasting stability. No BMS reset needed.

## ACTIVE PROTECTION.

Protects against over-charge, extreme-heat, short-circuit, over-discharge, extreme-cold, and over-current.

## SHOCK ABSORPTION.

Designed with a custom rubber dampening base and foam inserts to extend the life of the battery and keep connections secure.



NOCO

30339 Diamond Parkway, #102  
Glenwillow, OH 44139 | USA  
1.800.456.6626


no.co

NOCO  
LITHIUM

NOCO

## UNIVERSAL MOUNTING.

Modular spacers can be added to alter the size and allow the battery to be safely and securely mounted. A removable mounting block allows the battery to fit more applications. The threaded insert enables direct-mounting for additional simplicity and security.

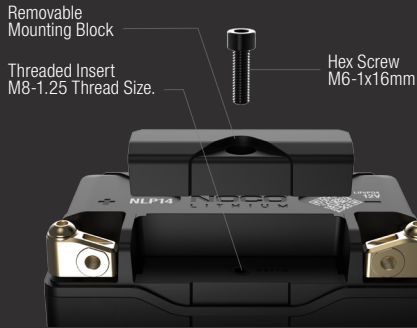

FEMALE.



SIDE.



TOP.



FRONT.



## MULTI-CONNECTION TERMINALS.

Equipped with premium IP66 waterproof copper PCB plates. NLP Terminals can be mounted from the front, side, or top, and can be removed altogether depending on the application.

## RAPID RECHARGE.

Use the Lithium mode on a Genius charger to fully recharge an NLP battery in minutes. See Genius models and charging times below.

## COMPATABLE SIZES.

### BCI SIZES

BT12A-BS  
BTZ10S  
BTZ14S  
BTZ12S  
BTX14  
BT14B-4  
BTX12-BS  
BTX14-BS  
BTX16-BS  
BTX20CH-BS  
BTX16-BS-1  
B16A-AB

### YUASA SIZES

GYZ16H  
YTX14H  
YTX20CH  
YTZ10S  
YTZ12S  
YTZ14S  
YTX14H-BS  
YTX20CH-BS  
YTX12  
YTX14  
YT12A-BS  
YTX12-BS  
KMX14-BS  
YTX14-BS  
YTX16-BS  
YTX16-BS-1  
HYB16A-AB

### ETX SIZES

ETX12  
ETX14  
ETX16L




## RECHARGE TIME

GENIUS1	240 Minutes
GENIUS2	120 Minutes
GENIUS5	48 Minutes
GENIUS10	24 Minutes


## TECHNICAL SPECIFICATIONS

BCI SIZE:	14
CHEMISTRY:	Lithium Iron Phosphate (LiFePO4)
NOMINAL VOLTAGE:	12.8
AMP-HOURS:	4
WATT-HOURS (WH):	51.2
STARTING CURRENT:	500
CHARGING VOLTAGE (V):	14.6V
CHARGING CURRENT (A):	12A (Max)
OPERATING TEMPERATURE:	-20°C to 60°C
CHARGING TEMPERATURE:	-10°C to 50°C
STORAGE TEMPERATURE:	-20°C to 60°C
LITHIUM CONTENT:	4.8 g
INTERNAL BATTERY WEIGHT:	1.16 lbs (0.53 kg)
WEIGHT:	2.58 lbs (1.17kg)
VOLUMETRICS:	<p><b>Retail Packaging:</b> Dimensions: 6.06" x 4.41" x 8.11" Weight: 4.05 lbs. UPC: 0-46221-19009-0</p> <p><b>Master Carton:</b> Dimensions: 13.0" x 8.82" x 10.32" Weight: 17.70 lbs Quantity: 4 UCC: 10046221190097</p> <p><b>Inner Carton:</b> Dimensions: 8.35" x 6.22" x 4.76" Weight: 4.24 lbs</p> <p><b>Units Per Pallet:</b> 180 Units</p>

## WHAT'S IN THE BOX

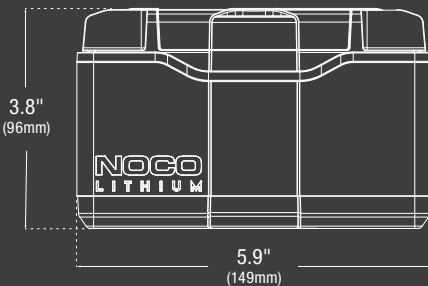

\*Accessories not to scale with NLP14

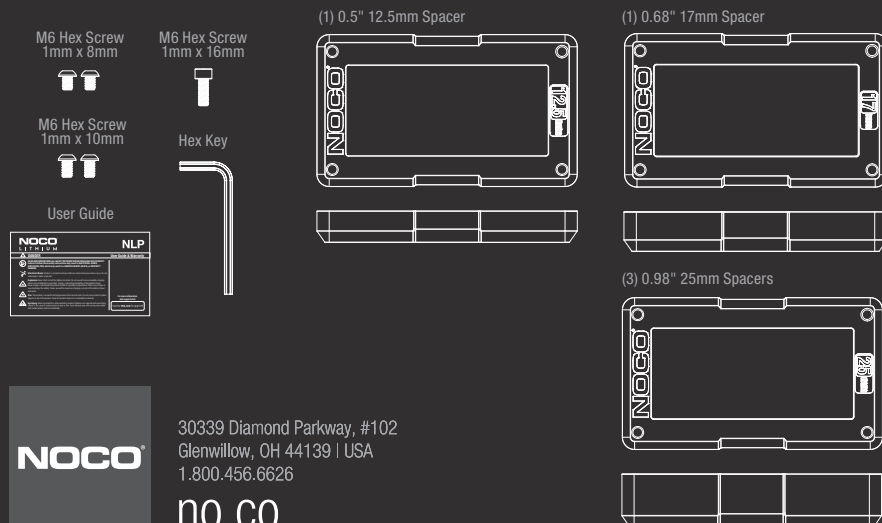

**NOCO**

30339 Diamond Parkway, #102  
Glenwillow, OH 44139 | USA  
1.800.456.6626

no.co

