

Made for
Apple WATCH

XDP3W



XDP3B



MagSafe® COMPATIBLE 3-IN-1 WIRELESS CHARGING PAD.

DESIGNED TO INSPIRE.

With its sleek, compact form, this charging dock goes beyond functionality, adding a touch of elegance that transforms any space into something extraordinary.

3-IN-1 FAST CHARGING.


Experience the next generation of wireless charging with 15W of Qi2 power for your iPhone®, a dedicated 5W fast charger for your Apple Watch®, and a 5W Qi pad for your AirPods® or other Qi-compatible devices.

SMART INDICATOR.

See at a glance when your AirPods® are perfectly positioned for charging or any of your devices are improperly aligned so you never accidentally miss a charge.

EVERYTHING IN ITS PLACE.

End cable clutter and embrace simplicity. Keep all your Apple devices perfectly aligned, fully charged, neatly organized - all in one place - ready for Nightstand mode.

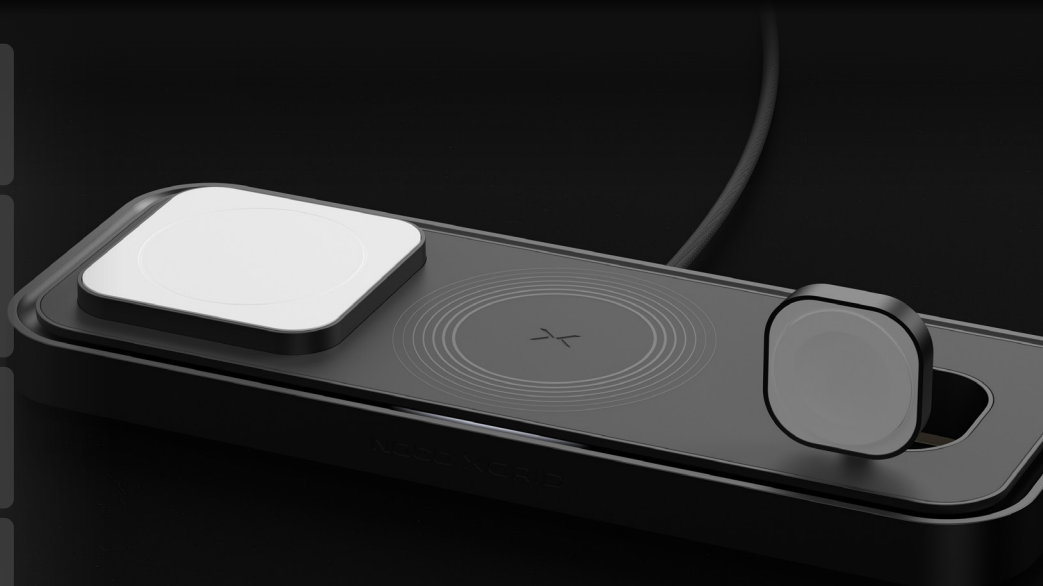

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co



**FAST CHARGE iPhone®
UP TO 15W**



**Qi2 MAGNETIC
FAST CHARGING**



**MagSafe®
COMPATIBLE**

3-IN-1 FAST CHARGING.

MEET THE XDP3.


A 3-in-1 wireless charging pad for seamlessly charging your iPhone®, Apple Watch®, and AirPods® - all at once - featuring MagSafe® compatible and Qi2 technology, making it the ultimate charging station.

5W Fast Charger for Apple Watch®
(Nightstand Mode Compatible).


15W Magnetic Fast Charger for
iPhone® (Qi2 Certified, MagSafe®
Compatible).

5W Qi Charger for Apple AirPods®
or other Qi-Compatible devices.

CHARGE IN 3 EASY STEPS.

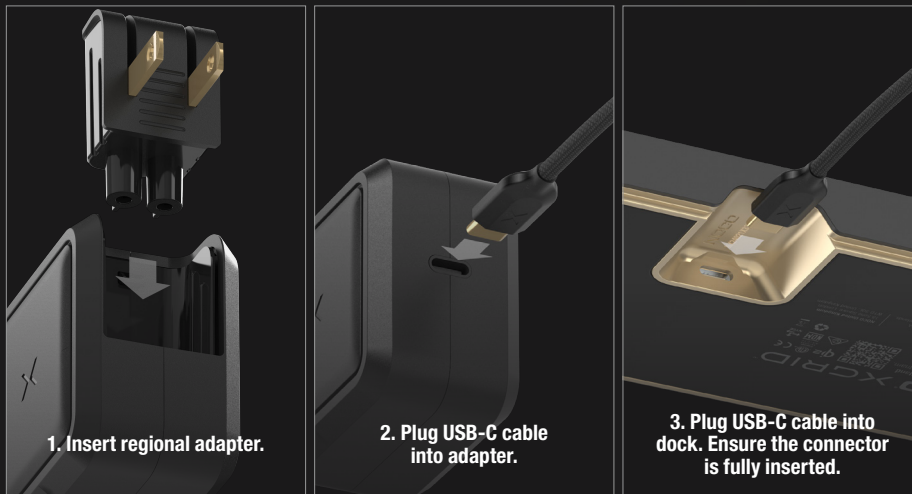

WHAT'S IN THE BOX

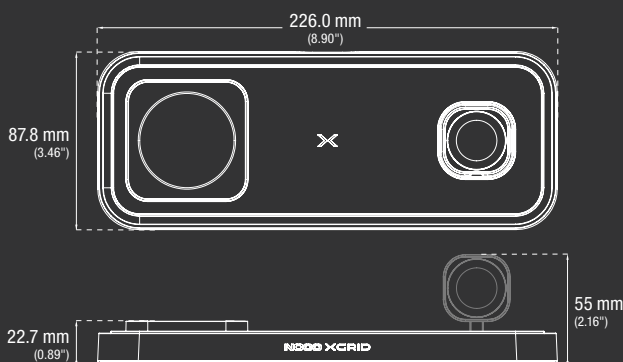

*Accessories not to scale with XDP3



2 m USB-C Cable



45W Power Adapter



Quick Start Guide



Safety and Warranty
Information



NA/JP TYPE A

EU TYPE C

UK TYPE G

AU TYPE I

TECHNICAL SPECIFICATIONS

INPUT:	45W (15V $\equiv$ 3A, 20V $\equiv$ 2.25A) USB-C PD
OUTPUT 1 (LEFT):	15W Max
OUTPUT 2 (CENTER):	5W Max
Apple Watch FAST CHARGER OUTPUT:	5W Max
TOTAL WIRELESS OUTPUT:	25W
POWER ADAPTER INPUT:	100-240V~50-60Hz 1.0A
POWER ADAPTER OUTPUT:	5.0V $\equiv$ 3.0A 15.0W, 9.0V $\equiv$ 3.0A 27.0W, 12.0V $\equiv$ 3.0A 36.0W, 15.0V $\equiv$ 3.0A 45.0W, 20.0V $\equiv$ 2.25A 45.0W, PPS:5.0-11.0V $\equiv$ 4.05A
POWER ADAPTER TOTAL OUTPUT:	45W
POWER ADAPTER OUTPUT TYPE:	USB-C PD 3.1
CABLE LENGTH:	2.0 m
CABLE CONNECTOR:	USB-C
CABLE WATTAGE:	60W
POWER DELIVERY:	3.1
DATA RATE:	480Mbps
OPERATING TEMPERATURE:	32° to 104°F (0° to 40°C)
STORAGE TEMPERATURE:	-4° to 158°F (-20° to 70°C)
WEIGHT:	1.72 lbs (0.78 kg)
VOLUMETRICS:	Retail Packaging: Dimensions: 9.84" x 4.41" x 3.50" Weight: 2.57 lbs XDP3B UPC: 0-46221-24023-8 XDP3W UPC: 0-46221-24024-5 Master Carton: Dimensions: 11.42" x 10.24" x 12.60" Weight: 20.55 lbs Quantity: 6 XDP3B ITF-14: 10046221240235 XDP3W ITF-14: 10046221240242 Inner Carton: Dimensions: 3.94" x 4.72" x 10.43" Weight: 3.24 lbs

NOCO®

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co



CAN ICES: 3(B)/NMB-3(B)
FCC ID: 2BH4L-XDP3
IC ID: 33239-XDP3
CONFORMS TO UL STD. 62368-1
CERTIFIED TO CSA STD.
C22.2.62368-1:2019 Ed.3