



USB-C

XDP3

Made for
 WATCH

XDP3W



XDP3B



MagSafe® COMPATIBLE 3-IN-1 WIRELESS CHARGING PAD.

DESIGNED TO ELEVATE.

With a compact footprint and sculpted form, it brings visual clarity to any space - intentionally designed, and thoughtfully refined - built to belong anywhere.

3-IN-1 FAST CHARGING.


Power your iPhone®, Apple Watch®, and AirPods® simultaneously with a MagSafe-compatible, Qi2-certified charging dock - engineered for fast, effortless alignment and refined simplicity.

SMART INDICATOR.

Subtle indicator lets you see at a glance when your AirPods® are perfectly positioned - or alert you if any device is misaligned - so you never return to a device left uncharged.

EVERYTHING IN ITS PLACE.

Align, charge, and organize your iPhone®, Apple Watch®, and AirPods® in one refined charging station - no cables, no clutter. Built for perfect placement and ready for Nightstand mode.

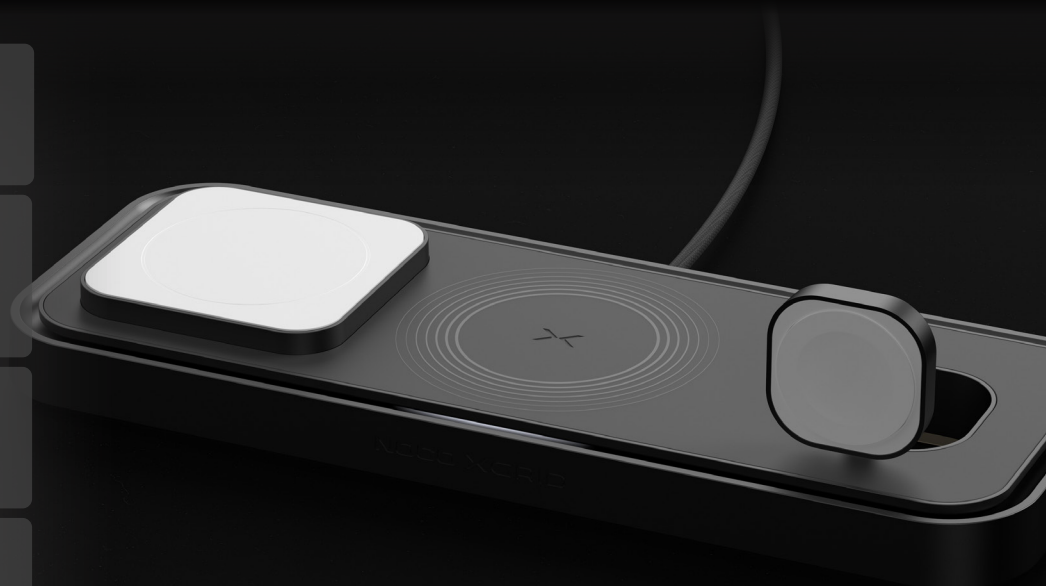

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co



FAST CHARGE iPhone®
UP TO 25W



Qi2 25W MAGNETIC
FAST CHARGING



MagSafe®
COMPATIBLE

POWER, PERFECTED.

MEET THE XDP3.


Experience next-gen wireless charging with Qi2-certified 25W fast charging for iPhone®, 5W for Apple Watch® (MFi-certified), and 5W for AirPods® or any Qi-compatible device.

5W Fast Charger for Apple Watch®
(Nightstand Mode Compatible).

25W Magnetic Fast Charger
for iPhone® (Qi2 25W Certified,
MagSafe® Compatible).

5W Qi Charger for Apple AirPods®
or other Qi-Compatible devices.


CHARGE IN 3 EASY STEPS.

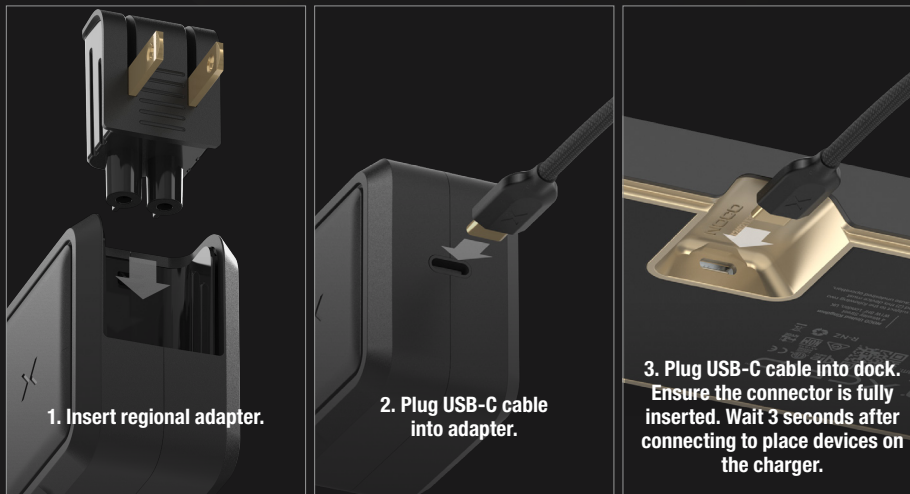

TECHNICAL SPECIFICATIONS

INPUT:	45W (15V $\equiv$ 3A) USB-C PD
OUTPUT 1 (LEFT):	25W Max
OUTPUT 2 (CENTER):	5W Max
Apple Watch® FAST CHARGER OUTPUT:	5W Max
TOTAL WIRELESS OUTPUT:	35W
POWER ADAPTER INPUT:	100-240V~50-60Hz 1.0A
POWER ADAPTER OUTPUT:	5.0V $\equiv$ 3.0A 15.0W, 9.0V $\equiv$ 3.0A 27.0W, 12.0V $\equiv$ 3.0A 36.0W, 15.0V $\equiv$ 3.0A 45.0W, 20.0V $\equiv$ 2.25A 45.0W, PPS:5.0-11.0V $\equiv$ 4.05A
POWER ADAPTER TOTAL OUTPUT:	45W
POWER ADAPTER OUTPUT TYPE:	USB-C PD 3.1
CABLE LENGTH:	2.0 m
CABLE CONNECTOR:	USB-C
CABLE WATTAGE:	60W
POWER DELIVERY:	3.1
DATA RATE:	480Mbps
OPERATING TEMPERATURE:	32° to 104°F (0° to 40°C)
STORAGE TEMPERATURE:	-4° to 158°F (-20° to 70°C)
WEIGHT:	1.87 lbs (0.85 kg)
VOLUMETRICS:	Retail Packaging: Dimensions: 9.84" x 4.41" x 3.50" Weight: 3.07 lbs XDP3B UPC: 0-46221-24023-8 XDP3W UPC: 0-46221-24024-5 Master Carton: Dimensions: 11.42" x 10.24" x 12.60" Weight: 20.58 lbs Quantity: 6 XDP3B ITF-14: 10046221240235 XDP3W ITF-14: 10046221240242 Inner Carton: Dimensions: 3.94" x 4.72" x 10.43" Weight: 3.22 lbs

WHAT'S IN THE BOX

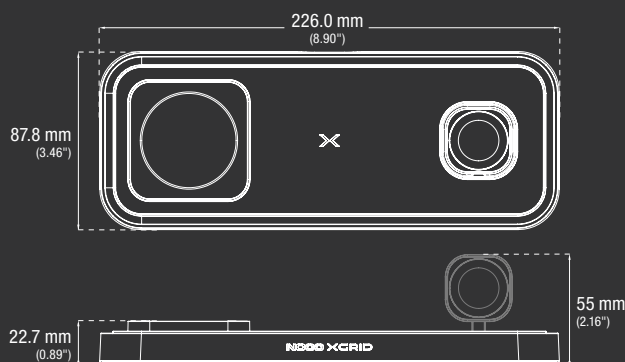

*Accessories not to scale with XDP3




2 m USB-C Cable



45W Power Adapter



Quick Start Guide



Safety and Warranty Information



NA/JP TYPE A

EU TYPE C

UK TYPE G

AU TYPE I

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co



FCC ID: 2B4L-XDP3V2
IC ID: 33239-XDP3V2