

Made for
Apple WATCH



XDS3W



XDS3B

MagSafe® COMPATIBLE 3-IN-1 WIRELESS CHARGING STAND.

DESIGNED TO INSPIRE.

With its sleek, compact form, this charging dock goes beyond functionality, adding a touch of elegance that transforms any space into something extraordinary.

3-IN-1 FAST CHARGING.

Experience the next generation of wireless charging with 15W of Qi2 power for your iPhone®, a dedicated 5W fast charger for your Apple Watch®, and a 5W Qi pad for your AirPods® or other Qi-compatible devices.

SMART INDICATOR.

See at a glance when your AirPods® are perfectly positioned for charging or any of your devices are improperly aligned so you never accidentally miss a charge.

EVERYTHING IN ITS PLACE.

End cable clutter and embrace simplicity. Keep all your Apple devices perfectly aligned, fully charged, neatly organized - all in one place - ready for StandBy mode.



NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co



**FAST CHARGE iPhone®
UP TO 15W**



**Qi2 MAGNETIC
FAST CHARGING**



**MagSafe®
COMPATIBLE**

3-IN-1 FAST CHARGING.

MEET THE XDS3.

A 3-in-1 wireless charging stand for seamlessly charging your iPhone®, Apple Watch®, and AirPods® - all at once - featuring MagSafe® compatible and Qi2 technology, making it the ultimate charging station.




5W Fast Charger for Apple Watch®

15W Magnetic Fast Charger for iPhone® (Qi2 Certified, Magsafe® and StandBy Mode Compatible)

5W Qi Charger for Apple AirPods® or other Qi-Compatible devices


CHARGE IN 3 EASY STEPS.

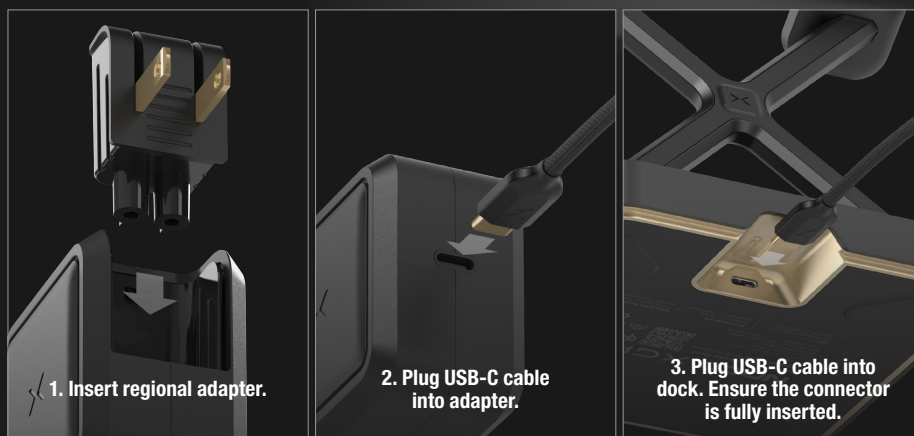

TECHNICAL SPECIFICATIONS

INPUT:	45W (15V ≡ 3A, 20v ≡ 2.25A) USB-C PD	
OUTPUT 1 (RIGHT):	15W Max	
OUTPUT 2 (CENTER):	5W Max	
Apple Watch FAST CHARGER OUTPUT:	5W Max	
TOTAL WIRELESS OUTPUT:	25W	
POWER ADAPTER INPUT:	100-240V~50-60Hz 1.0A	
POWER ADAPTER OUTPUT:	5.0V ≡ 3.0A 15.0W, 9.0V ≡ 3.0A 27.0W, 12.0V ≡ 3.0A 36.0W, 15.0V ≡ 3.0A 45.0W, 20.0V ≡ 2.25A 45.0W, PPS:5.0-11.0V ≡ 4.05A	
POWER ADAPTER TOTAL OUTPUT:	45W	
POWER ADAPTER OUTPUT TYPE:	USB-C PD 3.1	
CABLE LENGTH:	2.0 m	
CABLE CONNECTOR:	USB-C	
CABLE WATTAGE:	60W	
POWER DELIVERY:	3.1	
DATA RATE:	480Mbps	
OPERATING TEMPERATURE:	32° to 104°F (0° to 40°C)	
STORAGE TEMPERATURE:	-4° to 158°F (-20° to 70°C)	
WEIGHT:	2.09 lbs (0.95 kg)	
VOLUMETRICS:	Retail Packaging: Dimensions: 6.06" x 7.87" x 8.39" Weight: 3.33 lbs XDS3B UPC: 0-46221-24021-4 XDS3W UPC: 0-46221-24022-1	Master Carton: Dimensions: 8.86" x 13.78" x 9.84" Weight: 9.08 lbs Quantity: 2 XDS3B ITF-14: 10046221240211 XDS3W ITF-14: 10046221240228
	Inner Carton: Dimensions: 6.30" x 8.07" x 9.06" Weight: 4.00 lbs	

WHAT'S IN THE BOX

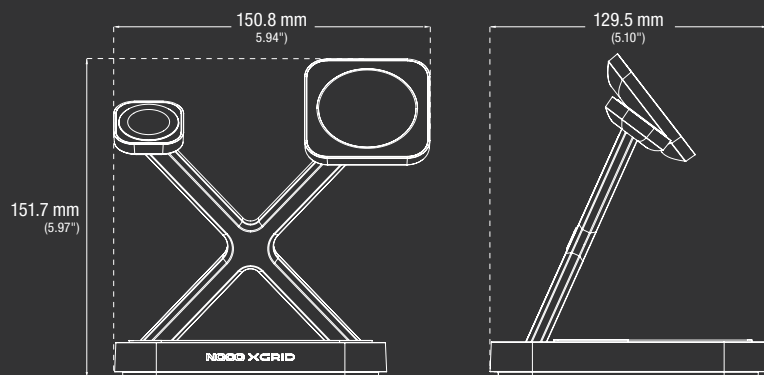

*Accessories not to scale with XDS3



2 m USB-C Cable



45W Power Adapter



Quick Start Guide



Safety and Warranty Information



NA/JP TYPE A

EU TYPE C

UK TYPE G

AU TYPE I

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co



CAN ICES: 3(B)/NMB-3(B)
FCC ID: 2B4L-XDS3
IC ID: 33239-XDS3

CONFORMS TO UL STD. 62368-1
CERTIFIED TO CSA STD.
C22.2.62368-1:2019 Ed.3